

Large Field Wooden Box Easel

USA E-500 Series

1

Loosen the wing nut on the side leg, generously.



2

Gently pull the leg away from the sketch box; just enough to release the hairpin latch.

Hairpin latch is located beneath here. It secures the leg to the sketch box.


Repeat Step 1 and 2 on the other side leg.



3

Rotate the side leg at the joint, until it fits into the recess. Tighten the wing nut until the leg is secured in place.

Repeat Step 3 on the other side leg.

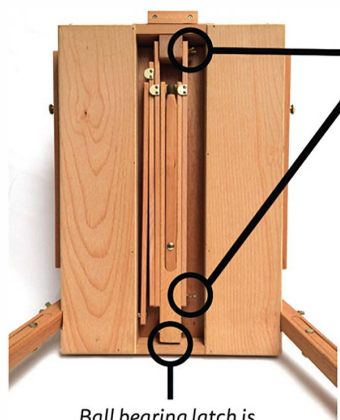

Ball bearing latch is located here.

4

Loosen the wing nuts of the back leg. Gently pull the bottom of the leg away from the sketch box; just enough to release the ball bearing latch. (Indicated.)

Extend the back leg and retighten wing nuts.



5

Loosen the thumb screws on each leg and extend the lower portion.

Retighten thumb screws to secure in place.

Make sure all legs are extended and secured in place.

Stand the easel upright.



6

Unlatch the canvas support and loosen the thumb screws on each side.

Lift the canvas support and adjust to desired position. Retighten thumb screws to secure in place.

7

Loosen the thumb screw indicated to adjust the mast height to desired position. Retighten thumb screw to secure in place.

